

TIRE INFORMATION SERVICE BULLETIN


SIDEWALL INDENTATIONS IN RADIAL TIRES



The condition, sometimes referred to as sidewall undulations, is a common characteristic of radial tire construction. These indentations are more noticeable in tire sizes with higher aspect ratios and/or higher inflation pressures.

In a radial tire the body ply cords run straight across the tire from bead to bead. The joining of the ply material creates a narrow overlap of ply cords in the radial direction at each junction. These overlapped ply cords slightly restrict the natural expansion of the sidewall when inflated. This results in an indentation. Since the belt plies reinforce the tread, only the sidewalls are indented.

- Continued Next Page -

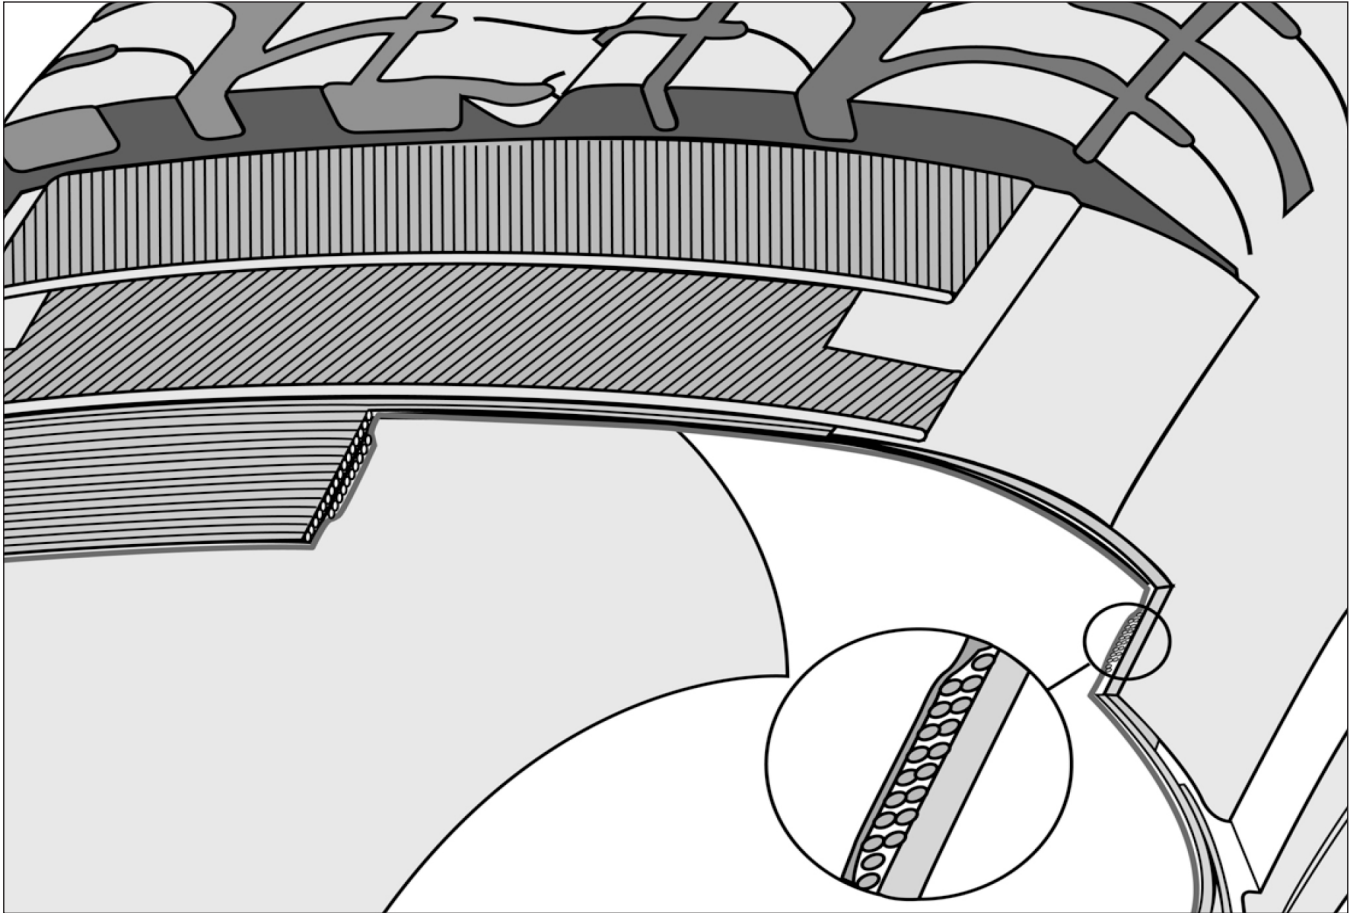

Sidewall indentations are a cosmetic characteristic and will not affect the performance of the tire. If bulges, rather than indentations, appear on the sidewall or if there is any question concerning the sidewall appearance, the tire should be examined by a tire service professional.

This Bulletin Replaces Volume 21, Number 3

This is a publication of the U.S. Tire Manufacturers Association.
Duplication and distribution of this work in the original form is permitted. All other rights reserved.
To receive USTMA publications call +1 202.682.4800 or go to USTires.org and click on Publications.